

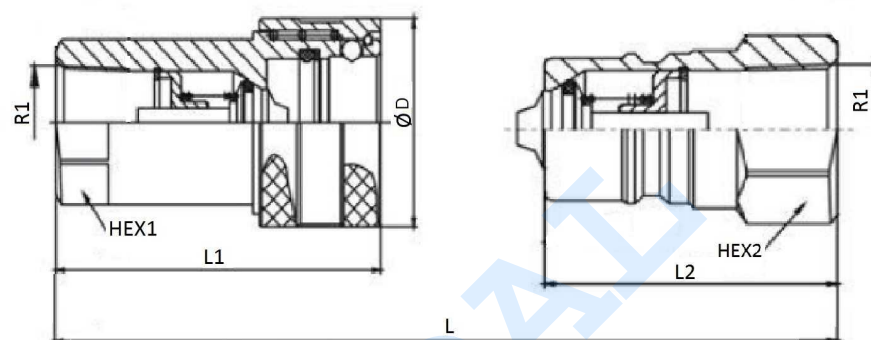
# TrAle®

Enchufes rápidos AISI 316

Enchufes rápidos TrAle

## Enchufes NPT TrAle 7241-A

Acero Inoxidable AISI 316-L

**Material:** Acero inoxidable**Juntas:** FKM + PTFE**Temperatura de trabajo:** -20°C / +180°C

| Artículo        | R1       | Presión trabajo (bar) | Tamaño ISO | Tamaño BG | Enchufe | L     | L1 | L2   | HEX 1 | HEX 2 | ØD |
|-----------------|----------|-----------------------|------------|-----------|---------|-------|----|------|-------|-------|----|
| <b>ZB801104</b> | 1/4" NPT | 250                   | 6,3        | 1         | M       | 71    | 50 | -    | 19    | -     | *  |
| <b>ZB801106</b> | 3/8" NPT | 250                   | 10         | 2         | M       | 75    | 56 | -    | 22    | -     | *  |
| <b>ZB801108</b> | 1/2" NPT | 250                   | 12,5       | 3         | M       | 88    | 66 | -    | 27    | -     | *  |
| <b>ZB801112</b> | 3/4" NPT | 250                   | 20         | 4         | M       | 110   | 80 | -    | 34    | -     | *  |
| <b>ZB801116</b> | 1" NPT   | 200                   | 25         | 5         | M       | 119,5 | 94 | -    | 41    | -     | *  |
| <b>ZB801204</b> | 1/4" NPT | 250                   | 6,3        | 1         | H       | 71    | -  | 35,5 | -     | 19    | *  |
| <b>ZB801206</b> | 3/8" NPT | 250                   | 10         | 2         | H       | 75    | -  | 36,5 | -     | 22    | *  |
| <b>ZB801208</b> | 1/2" NPT | 250                   | 12,5       | 3         | H       | 88    | -  | 43,5 | -     | 27    | *  |
| <b>ZB801212</b> | 3/4" NPT | 250                   | 20         | 4         | H       | 110   | -  | 57   | -     | 35    | *  |
| <b>ZB801216</b> | 1" NPT   | 200                   | 25         | 5         | H       | 119,5 | -  | 59,5 | -     | 41    | *  |